

# HIOKI

INSULATION TESTER Series



# INSULATION TESTERS

# Digital

**DROP PROOF**



Built tough to withstand a 1-meter drop onto a concrete floor



**5 ranges**

Rated output voltage (DC)  
Effective maximum indicated value

- 50 V / 100 MΩ**
- 125 V / 250 MΩ**
- 250 V / 500 MΩ**
- 500 V / 2000 MΩ**
- 1000 V / 4000 MΩ**

## Manage measurement data using Bluetooth® communication



WIRELESS ADAPTER Z3210 (Option)  
Attach to enable Bluetooth® wireless technology



Learn More


### Transport to the Excel® file



Location	Circuit no.	Ref. value	Measurement place	Value(MΩ)
Mok Circuit Breaker A	R-E	101	M Ohm	
	S-E	101	M Ohm	
	T-E	101	M Ohm	
	S-S	85.4	M Ohm	
	S-T	99.9	M Ohm	
	T-E	99.9	M Ohm	


Open an Excel® file and select a cell. The measured value being held on the instrument's display will be transferred to the computer and entered into the selected cell.

### Transport to GENNECT Cross




Learn More

GENNECT Cross, a free app designed specifically for use with Hioki measuring instruments, lets you check and manage measurement results and create reports. The software provides a range of functionality that helps manage data in the field, including photographing measurement sites, placing measurement results on photographs, and saving handwritten memos.

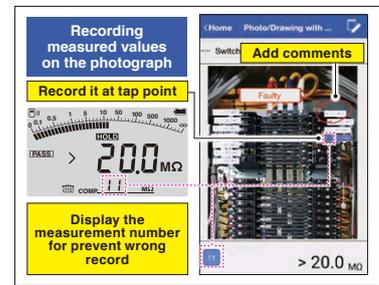

## Significantly improve testing speed using test lead with remote switch

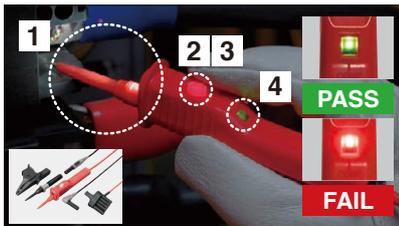

- 1 LED light shines a spotlight on the target
- 2 Red light warns of live voltage detection
- 3 Measurement start switch
- 4 Identify pass/fail decisions with red or green light

TEST LEAD SET WITH REMOTE SWITCH L9788-11 (Option)  
\*Standard with the IR4056-21, Not CE Marked

## Identify PASS / FAIL using light and sound



Compare measured values to pre-set reference values to generate a pass or fail decision with the Comparator function.

## Convenient for inspections

### Low resistance measurement<sup>1</sup>

Perform EV and HEV continuity checks as well as resistance measurement of protective conductors in facility electrical equipment as defined by IEC 60364.

### AC/DC voltage measurement


Automatically detect AC or DC for testing. Use as a tester thanks to DC voltage measurement functionality.

### PV Ω dedicated function<sup>2</sup>

Measurement is not affected even when the PV system is online.

1. Excludes IR4053 2. IR4053 Only

## One-touch Start and Stop



Measurement voltage is applied while MEASURE key is pressed



Lift and lock the MEASURE key to apply a continuous stream of voltage

## Prevent Accidental High Voltage Generation



Under [500V], [1000V], or [PVΩ] settings, the RELEASE button will blink. Press to unlock the release of high voltages as an extra safety measure.





Product warranty for 3 years  
Accuracy guaranteed for 1 year

## Lineup - Digital

Measurement type	Low voltage (less than 1000 V)				High voltage (less than 5000 V)	
	Standard	High-speed	EV	PV		Standard
Model	IR4056-20 IR4056-21	IR4057-50	IR4059	IR4053-10	IR5051	IR5050
Appearance						
Number of ranges	5				5	
Testing voltage (DC) / Effective maximum indicated value	50 V /100 MΩ 125 V /250 MΩ 250 V /500 MΩ 500 V /2000 MΩ 1000 V /4000 MΩ				250 V /500 GΩ 500 V /1.00 TΩ 1000 V /2.00 TΩ 2500 V /5.00 TΩ 5000 V /10.00 TΩ	
PV Ω measurement	N / A		500 V / 2000 MΩ 1000 V / 4000 MΩ		500 V /100 GΩ 1000 V /100 GΩ 1500 V /100 GΩ	N / A
Leakage current measurement	N / A				0.00 nA to 3.00 mA	
DC voltage measurement	600 V		1000 V		2000 V	
AC voltage measurement	600 V				1000 V	
Low resistance measurement	✓		N / A		N / A	
Displaying 1-min. values	N / A	✓		N / A	✓	
Comparator decision response time	✓ 0.8 second	✓ 0.3 second		✓ 0.8 second (PV : 4 second)	✓	
AUTO power save	✓				✓	
Bluetooth® communication	N / A	✓ (With Z3210)		N / A	✓ (With Z3210)	
Resistance gauge	N / A	✓		N / A	✓	
Backlight	✓				✓	
Safety standard category	CAT III 600 V				CAT IV 1000 V CAT III 2000 V	
CE	✓ <sup>1</sup>				✓	
Dustproof and waterproof	IP40 <sup>2</sup>				IP40 <sup>2,3</sup> , IP65 <sup>4</sup>	
Drop proof	✓				N / A	
Power supply	LR03 (AAA) alkaline battery × 4 HR6 (AA) NiMH rechargeable battery x4				LR6 (AA) alkaline battery × 8 HR6 (AA) NiMH rechargeable battery x8	
Dimensions ( W × H × D )	159 × 177 × 53 mm 6.26 × 6.97 × 2.09 in.		160 × 98 × 46 mm 6.30 × 3.86 × 1.81 in.	159 × 177 × 53 mm 6.26 × 6.97 × 2.09 in.	195 × 254 × 89 mm 7.68 × 10 × 3.50 in.	
Weight	600 g (21.2 oz)	640 g (22.6 oz)	536 g (18.9 oz)	600 g (21.2 oz)	1.7 kg (59.97 oz)	

1 : IR4056-21 excluded 2 : Terminal not included 3 : With protector attached 4 : CARRYING CASE C0212

## INSULATION TESTER IR4056-20, IR4056-21

**CE** \* IR4056-20 only  
 Product warranty for 3 years  
 Accuracy guaranteed for 1 year



With  
 • TEST LEAD L9787  
 • Neck strap  
 • LR6 alkaline battery x4  
 • Instruction manual

**IR4056-20**



With  
 • TEST LEAD SET WITH REMOTE SWITCH L9788-11  
 • Neck strap  
 • LR6 alkaline battery x4  
 • Instruction manual

**IR4056-21 Not CE marked**



**5 ranges**

Comparator decision response time : 0.8 s

**CAT III 600 V**

## INSULATION TESTER IR4057-50, IR4059

**CE** **SR** \* IR4057-50 only  
 Product warranty for 3 years  
 Accuracy guaranteed for 1 year



**IR4057-50**



**IR4059**



**L4930**



**L4938**



**WIRELESS ADAPTER Z3210 (Option)**

Attach to enable Bluetooth® wireless technology

**With Z3210**



Please see [www.hioki.com](http://www.hioki.com) for list of supported regions.



**5 ranges**

Comparator decision response time : 0.3 s

**Digital bar graph**

**CAT III 600 V**

Included accessories

- CONNECTION CABLE L4930
- ALLIGATOR CLIP SET L4935
- TEST PIN SET L4938
- TEST LEAD SET WITH REMOTE SWITCH (RED) L9788-10 (IR4059 only)
- PROTECTOR Z5042 (IR4059 only)
- Neck strap
- LR6 alkaline battery x4
- Instruction manual

## INSULATION TESTER (For Photovoltaic Generation Systems) IR4053-10

**CE**  
 Product warranty for 3 years  
 Accuracy guaranteed for 1 year



With  
 • TEST LEAD L9787  
 • Neck strap  
 • LR6 alkaline battery x4  
 • Instruction manual

**IR4053-10**



**5 ranges**

Comparator decision response time : 0.8 s

Comparator decision response time (PV) : 4 s

**CAT III 600 V**

Model	IR4056-20	IR4056-21	IR4057-50	IR4059	IR4053	Basic accuracy						
						Testing voltage (DC)	50 V	125 V	250 V	500 V	1000 V	-
Measurement parameters	Insulation resistance	✓	✓	✓	✓	Effective maximum indicated value (MΩ)	100	250	500	2000	4000	-
						1st effective measuring range (MΩ)	0.200 to 10.00	0.200 to 25.0	0.200 to 50.0	0.200 to 500	0.200 to 1000	±2% rdg. ±2 dgt.
						2nd effective measuring range (MΩ)	10.1 to 100.0	25.1 to 250	50.1 to 500	501 to 2000	1010 to 4000	±5% rdg.
	PV Ω measurement	N/A	N/A	N/A	✓	✓	Testing voltage (DC)	500 V		1000 V		-
							Effective maximum indicated value (MΩ)	2000		4000		-
							1st effective measuring range (MΩ)	0.200 to 500		0.200 to 1000		±4% rdg.
DC Voltage	N/A	N/A	N/A	N/A	N/A	2nd effective measuring range (MΩ)	501 to 2000		1010 to 4000		±8% rdg.	
						4.200 V/42.00 V/420.0 V/1000 V	4.200 V/42.00 V/420.0 V/600 V		4.200 V/42.00 V/420.0 V/600 V		±1.3% rdg. ±4 dgt. <sup>1</sup>	
AC Voltage	✓	✓	✓	✓	✓	420.0 V <sup>2</sup> /600 V	420.0 V <sup>2</sup> /600 V		420.0 V <sup>2</sup> /600 V		±2.3% rdg. ±8 dgt. <sup>1</sup>	
Low resistance measurement	✓	✓	✓	✓	✓	10.00 Ω/100.0 Ω/1000 Ω	10.00 Ω/100.0 Ω/1000 Ω		10.00 Ω/100.0 Ω/1000 Ω		±3% rdg. ±2 dgt.	

Other	Operating temperature	IR4056-20, IR4056-21, IR4057-50, IR4059: -25°C to 65°C, 90% RH or less (non-condensating) IR4053: 0°C to 50°C, 90% RH or less (non-condensating)	Order code <b>IR4056-20</b>
	Storage temperature	IR4056-20, IR4056-21, IR4057-50, IR4059: -25°C to 65°C, 90% RH or less (non-condensating) IR4053: -10 °C to 50°C, 90% RH or less (non-condensating)	Order code <b>IR4056-21</b>
	Dustproof and waterproof	IP40 (Terminal excluded)	Order code <b>IR4057-50</b>
	Standards	EN61326 (EMC), EN61557-1/-2/-4/-10	Order code <b>IR4057-90</b>
	Power supply	LR6 alkaline battery x4	Order code <b>IR4059</b>
	Continuous operating time	20 hours	Order code <b>IR4053-10</b>
	Dimensions ( W x H x D )	IR4056-20, IR4056-21, IR4057-50, IR4053-10: 159 x 177 x 53 mm (6.26 x 6.97 x 2.09 inch) IR4059: 160 x 98 x 46 mm (6.30 x 3.86 x 1.81 inch)	Order code <b>Z3210</b>
Weight	IR4056-20, IR4056-21, IR4053: 600 g (21.2 oz) IR4059: 536 (18.9 oz) IR4057-50: 640 g (22.6 oz)	Model IR4057-90 includes Z3210 as a set	

1. Ranges in excess of 600 V/1000 V are outside the accuracy guarantee  
 2. Minimum indicated value: 30.0 V  
 3. Subclause 4.3 of Part 4 (interchanging of test leads) is not applicable when L9788-10 is used



# HIGH VOLTAGE INSULATION TESTER IR5050, IR5051

Product warranty for 3 years  
Accuracy guaranteed for 1 year



IR5050

IR5051  
IR5051-90  
(Include Z3210 as a set)



Measurement parameters	Testing voltage (DC) : measuring range	250 V	0.00 MΩ to 500 GΩ
		500 V	0.00 MΩ to 1.00 TΩ
		1000 V	0.00 MΩ to 2.00 TΩ
		2500 V	0.00 MΩ to 5.00 TΩ
		5000 V	0.00 MΩ to 10.00 TΩ
	Rated current	1 mA to 1.2 mA	
	Short-circuit current	2 mA or less	
	Accuracy	±5% rdg. ±5 dgt., ±20% rdg.	
	Induced noise removal	3 mA max.	
	Leakage current	10 nA/ 100 nA/ 1000 nA/ 10 μA/ 100 μA/ 1 mA Guaranteed accuracy range: 1.00 nA to 3.00 mA Accuracy: ±3% rdg. ±3 dgt.	
DC voltage	±10 V to ±2000 V Accuracy: ±3% rdg. ±3 dgt.		
AC voltage	30 V to 1000 V Accuracy: ±3% rdg. ±3 dgt.		
Capacitance	100 nF/ 1000 nF/ 10 μF Guaranteed accuracy range: 10.0 nF to 25.0 μF Accuracy: ±10% rdg. ± 5 nF		
PV insulation resistance (IR5051 only)	500 V	0.00 MΩ to 100 GΩ	
	1000 V	0.00 MΩ to 100 GΩ	
	1500 V	0.00 MΩ to 100 GΩ	
Operating temperature and humidity range	-20°C to 40°C, less than 80% RH (no condensation)		
	40°C to 45°C, less than 60% RH (no condensation)		
	45°C to 50°C, less than 50% RH (no condensation)		
Storage temperature and humidity range	-25°C to 65°C, less than 80% RH (no condensation)		
Dustproof/waterproof	IP40 <sup>1</sup> , IP65 (CARRYING CASE C0212)		
Other	Standards	EN IEC61010 (safety), EN61326 (EMC), IEC61557-1, -2 (insulation resistance tester)	
	Power supply Continuous operating time	<ul style="list-style-type: none"> <li>• LR6 (AA) alkaline battery x8:                             <ul style="list-style-type: none"> <li>• Approx. 5 hours without Z3210 installed</li> <li>• Approx. 4 hours with Z3210 installed and using wireless communication</li> </ul> </li> <li>• HR6 (AA) nickel-metal hydride (NiMH) rechargeable battery x8</li> </ul>	
Dimensions ( W x H x D )	195mm (7.68 in.) x 254 mm (10 in.) x 89 mm (3.50 in.)		
Weight	1.7 kg (59.97 oz.)		

5 ranges

For PV systems

CAT IV 1000 V, CAT III 2000 V

Order code **IR5050**

Order code **IR5051**

Order code **IR5051-90**

**Included accessories**



- TEST LEAD L9850-01 (Red), -02 (Black), -03 (Blue), 3 m (9.84 ft.)
- ALLIGATOR CLIP L9851-01 (Red), -02 (Black), -03 (Blue)
- CARRYING CASE C0212
- LR6 alkaline battery x8
- Instruction manual
- TEST PIN SET L9852 (IR5051 and IR5051-90 only)
- WIRELESS ADAPTER Z3210 (IR5051-90 only)

L9850, L9851

1. With protector attached, excluding terminals

**Accurate, easy-to-use insulation resistance meter**

CAT III 2000 V  
CAT IV 1000 V

**Start:**  
Press and hold for 1 sec.



**Complete:**  
Auto-discharge




**Never miss a change in measurement.**

**During measurement:**  
Simultaneous display of test voltage, insulation resistance and leakage current

**After measurement:**  
Insulation indexes (PI, DAR, DD) and capacitance can be displayed.

**Failures caused by the application of a high voltage can be prevented.**

Keep the applied voltage as low as possible



**Precision stability in high voltage insulation testing**



**Shielded wire** minimizes measurement variability.

**GUARD terminal** minimizes the effects of leakage current flowing through the insulation's surface.

- **Filter function**
- **Inductive noise rejection function** (up to 3 mA)
- **Minuscule current measurement technology**

**Wireless communication for even greater convenience**



(The optional Wireless Adapter Z3210 is required.)

## Measure insulation resistance while the solar PV system continues to generate

**IR5051**  
Up to 2000V

**IR4053**  
Up to 600V

### PV insulation resistance measurement function

In the past, it was impossible to measure a PV system's insulation resistance while the system was operating because the measurement current and generated current would mix together. Consequently, it was necessary to make such measurements at night, when the system being measured was not generating electricity. The PV insulation resistance measurement function can measure PV systems while they're operating during daylight hours, without being affected by the generated current.

# Analog Meters

**DROP PROOF**



Built tough to withstand a 1-meter drop onto a concrete floor



Single range  
IR4016-20  
IR4017-20  
IR4018-20

3 range  
3490

**See better in the dark**



Bright LED

**Significantly improve testing speed using test lead with remote switch**



L9788-11 (Option)

- Start and stop the test at the touch of a button
- Illuminate the test location with a bright white LED
- Work safely knowing that when the RED is lit, live wires, high voltage or electrical discharge is present

**Check for Live Circuits**



The LIVE CIRCUIT LED will light up in red whenever the voltage exceeds 20 V AC between the LINE and EARTH terminals, and when at least 20 V DC is still remaining during the auto discharge.


**One-touch Start and Stop**

**Single test**



Measurement voltage is applied while MEASURE key is pressed

**Continuous test**

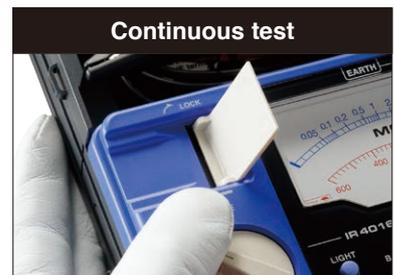

Lift and lock the MEASURE key to apply a continuous stream of voltage

**Flip the Cover**

Quick and easy storage without disconnecting the leads



**Check the Battery Status**





Product warranty for 3 years  
Accuracy guaranteed for 1 year

# Lineup - Analog Meters

		1 Range		3 Ranges	
		IR4016 -20	IR4017 -20	IR4018 -20	3490
Measurement parameters		Testing voltage (DC)	500 V		
		Effective maximum indicated value	100 MΩ		
		1st effective measuring range	0.1 MΩ to 50 MΩ		
	2nd effective measuring range	0.01 MΩ to 0.1 MΩ or less 50 MΩ or more to 100 MΩ			
		Testing voltage (DC)	500 V		
		Effective maximum indicated value	1000 MΩ		
		1st effective measuring range	1 MΩ to 500 MΩ		
	2st effective measuring range	0.5 MΩ to 1 MΩ or less 500 MΩ or more to 1000 MΩ			
		Testing voltage (DC)	1000 V		
		Effective maximum indicated value	2000 MΩ		
1st effective measuring range		2 MΩ to 1000 MΩ			
2nd effective measuring range	1 MΩ to 2 MΩ or less 1000 MΩ or more to 2000 MΩ				
	Testing voltage (DC)	250 V	500 V	1000 V	
	Effective maximum indicated value	100 MΩ		4000 MΩ	
	1st effective measuring range	0.05 MΩ to 50 MΩ		2 MΩ to 1000 MΩ	
2nd effective measuring range	0.01 MΩ to 0.05 MΩ or less 50 MΩ to 100 MΩ		0.5 MΩ to 2 MΩ 1000 MΩ to 4000 MΩ		
Accuracy (Insulation)	±2% of scale length (1st effective measuring range) ±2% of scale length (2nd effective measuring range)				
AC Voltage	0 to 600 V				

Other	
Operating temperature	0°C to 40°C, 90% RH or less (non-condensating)
Storage temperature	-10°C to 50°C, 90% RH or less (non-condensating)
Dustproof and waterproof	IP40 (Excludes measuring terminals)
Drop proof	YES
Backlight	YES
Safety standard category	CAT III 600 V
Standards	EN61010 (Safety), EN61326 (EMC)
Power supply	LR6 alkaline battery x4
Continuous operating time	20 hours
Dimensions( W × H × D )	IR4016, IR4017, IR4018: 162 × 182 × 57 mm (6.38 × 7.17 × 2.24 in) 3490: 162 × 167 × 52 mm (6.38 × 6.57 × 2.05 in)
Weight	IR4016, IR4017, IR4018: 820 g (28.9 oz), 3490: 840 g (29.6 oz)

## Accessories




L9787

- TEST LEAD L9787 (1.2 m)
- Neck strap
- LR6 alkaline battery x4
- Instruction manual

Order code	<b>IR4016-20</b>
Order code	<b>IR4017-20</b>
Order code	<b>IR4018-20</b>
Order code	<b>3490</b>

# Options

<b>IR4016-20, IR4017-20, IR4018-20, IR4056-20, IR4056-21, IR4057-50, IR4057-90, IR4053-10, IR4059, 3490</b>
1 TEST LEAD SET WITH REMOTE SWITCH L9788-11
2 TEST LEAD WITH REMOTE SWITCH (RED) L9788-10
3 TIP PIN L9788-90
4 BREAKER PIN L9788-92
5 MAGNETIC ADAPTER 9804-01
6 MAGNETIC ADAPTER 9804-02
7 TEST LEAD L9787
8 CONNECTION CABLE SET L4930
9 ALLIGATOR CLIP SET L4935
10 TEST PIN SET L4938
11 BREAKER PIN L9787-91
12 WIRELESS ADAPTER Z3210 (For IR4057-50, IR4059)
13 PROTECTOR Z5042 (For IR4059)
14 CARRYING CASE C0213 (EV MAINTENANCE MANUAL INCLUDED)

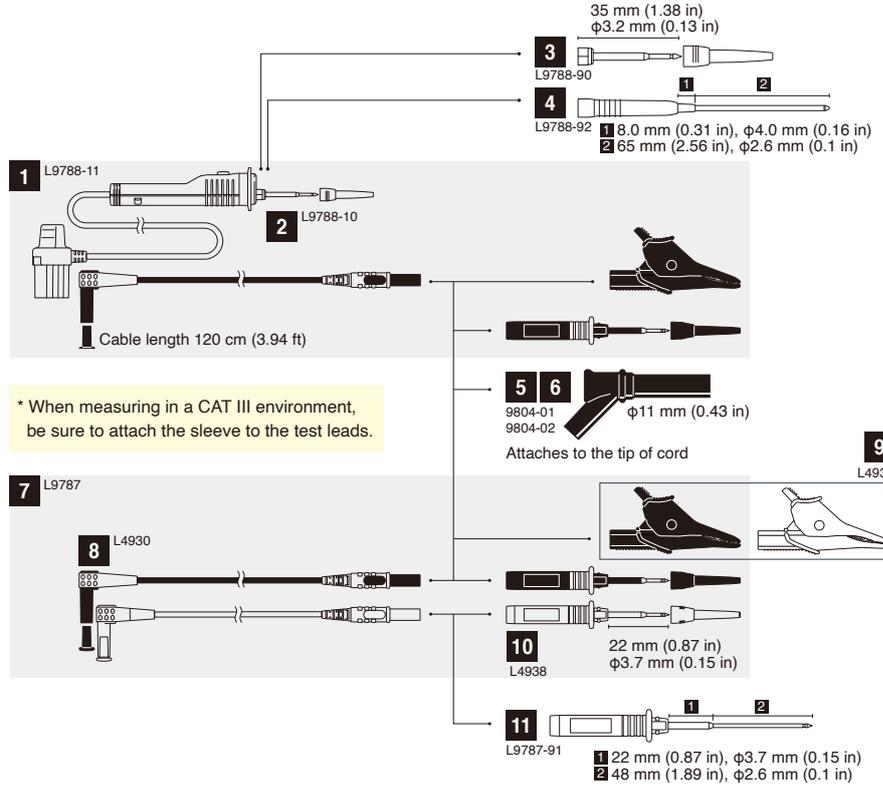

<b>IR5050, IR5051</b>	
1 TEST LEAD L9850 -01	Red, 3 m (9.84 ft.)
2 TEST LEAD L9850 -02	Black, 3 m (9.84 ft.)
3 TEST LEAD L9850 -03	Blue, 3 m (9.84 ft.)
4 TEST LEAD L9850 -11	Red, 10 m (32.81 ft.)
5 TEST LEAD L9850 -12	Black, 10 m (32.81 ft.)
6 TEST LEAD L9850 -13	Blue, 10 m (32.81 ft.)
7 ALLIGATOR CLIP L9851 -01	Red
8 ALLIGATOR CLIP L9851 -02	Black
9 ALLIGATOR CLIP L9851 -03	Blue
10 TEST PIN SET L9852	Red and black
11 CARRYING CASE C0212	
12 WIRELESS ADAPTER Z3210	
13 COMMUNICATION PACKAGE DT4900-01 USB	



**HIOKI**  
HIOKI E. E. CORPORATION

**HEADQUARTERS**  
81 Koizumi,  
Ueda, Nagano 386-1192 Japan  
<https://www.hioki.com/>



Note: Company names and product names appearing in this brochure are trademarks or registered trademarks of various companies.

DISTRIBUTED BY